




▶ MAJOR ADVANTAGES

- Exceptional dirt resistance
- **Very high flexibility and handling**
- Grainy aspect and matt finish for an ultra-contemporary, natural appearance
- Greenguard indoor air quality certification
- 5-year warranty
- Phthalate-free product formulation

TECHNICAL SPECIFICATIONS


	Stam 6002	Stam 6002 Opaque	Standards
Yarn	550/1100 dtex PES HT	550/1100 dtex PES HT	TERSUISSE
Weight	630 g/m ²	730 g/m ²	EN ISO 2286-2
Width unis et bicolores	260 cm	260 cm	
Width rayures	261 cm		
Standard format length*	± 50 lm	± 50 lm	
Tensile strength (warp/weft)	250/250 daN/5 cm	250/250 daN/5 cm	EN ISO 1421
Tear strength (warp/weft)	20/20 daN	20/20 daN	DIN 53.363
Adhesion	8/8 daN/5 cm	8/8 daN/5 cm	EN ISO 2411
Finish	Matt PVDF	Mat PVDF	
Flame retardancy	M2/NFP 92-507 • B1/DIN 4102-1 • CAN/ULC-S109 • METHOD 2/NFPA 701 • VKF 5.3/SN 198898 • Classe 2/UNI 9177 • BS 7837 • 1530.3/AS/NZS • G1/GOST 30244-94 • Class A/ASTM E84 • M2/UNE 23-727-90 • CSFM T19 • CPAI 84	M2/NFP 92-507 • B1/DIN 4102-1	
Euroclass	B-s2, d0/EN 13501-1	B-s2, d0/EN 13501-1	
Cold resistance	- 30°C	- 30°C	
Heat resistance	+ 70°C	+ 70°C	
Quality management system			ISO 9001

STRIPE RHYTHM AND ASSEMBLY RECOMMENDATIONS (IN CM)

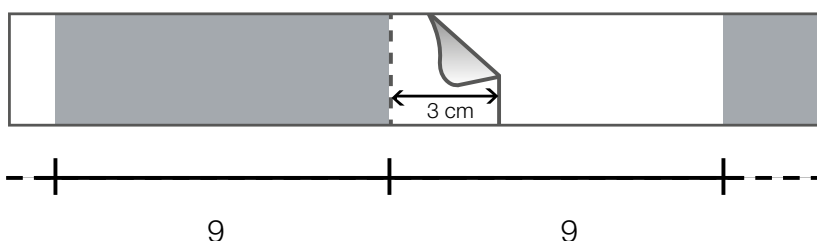


COLOURS & REFERENCES


Single coloured

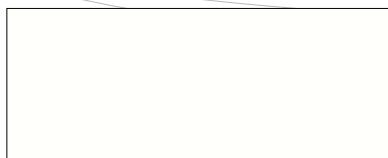

6002-20183



6002-10387

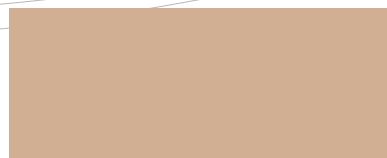

6002-20191



6002-20001



6002-20201




6002-20165



6002-20024



6002-20205



6002-20007



6002-20189



6002-20184



6002-20186

Stripes



6002-20193

Dual coloured




6002-20199

Opaque



6002-20213



6002-20211



6002-20209